



0 713091 605046

ps-rocket-cpu-WPC89

KIT CONTENT



x1



x1



x1

Extra tools



x1





x1


TOOLS

1 OFF

2 OPEN BACKBOX



3 DISCONNECT AND REMOVE ORIGINAL CPU

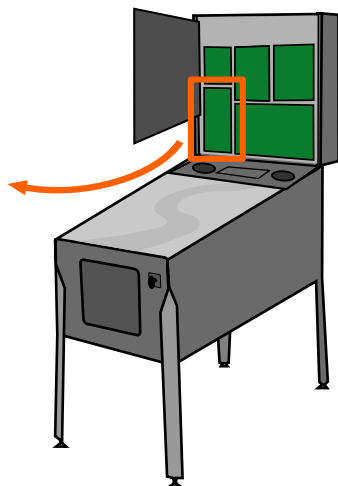

If your RocketCPU is
"Ready To Play"
please go to step


10

WARNING


The following steps need to be followed carefully. Any failures or consequences are at your own risk and liability. In no case does the warranty cover any damages or indirect damages caused by a careless installation or handling mistake.

Please contact a technician if you do not feel confident doing it yourself.


4 REMOVE PROCESSOR U4 5 TRANSFER U4 TO ROCKETCPU

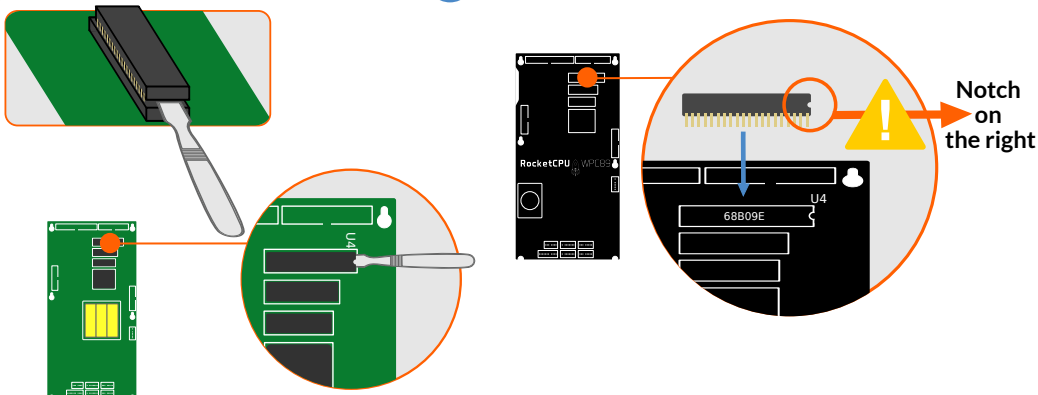


6 REMOVE EPROM U6 7 TRANSFER EPROM U6 TO ROCKETCPU

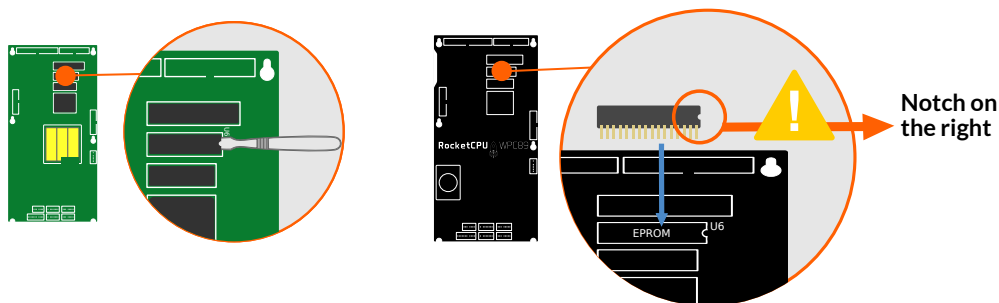

8 REMOVE ASIC U9 9 TRANSFER ASIC U9 TO ROCKETCPU

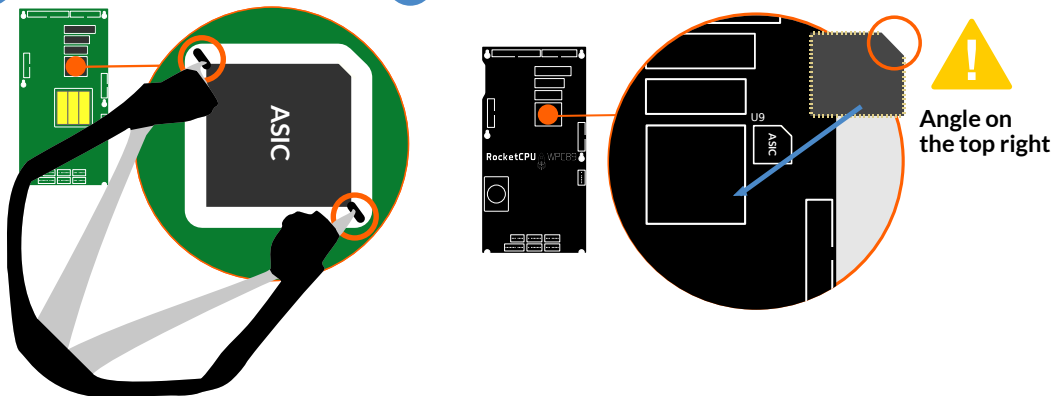


10) INSERT BATTERY




CR2032
+


11) INSTALL THE BOARD IN



12) CONNECT



Ribbon cables must be positioned according to the "RED WIRE" location



Depending on your machine, some connectors might not be used

13) CHECK DEFAULT SETTINGS

ON

OFF

OFF

OFF

ON

ON

W15


W16

W17

W18

America1	ON	ON	ON	ON
America2	OFF	OFF	OFF	OFF
Europe	ON	OFF	ON	ON
France	ON	ON	OFF	OFF
Germany	ON	ON	ON	OFF
Spain	OFF	ON	ON	ON

Country Selection



Default Jumpers Settings

ON

OFF

W1

W2

W3

W4


W5

W6

W7

W8

14) MACHINE ON



15) CHECK STATUS LED

Status LED

D19

Blanking

D20

Running

D21

Power

Off

Blinking green

Green

16) ENJOY!

Have fun with your new CPU!

NEED HELP?

www.pinsound.org/support






RECOMMENDED PINSOUND PRODUCTS



Sound Board

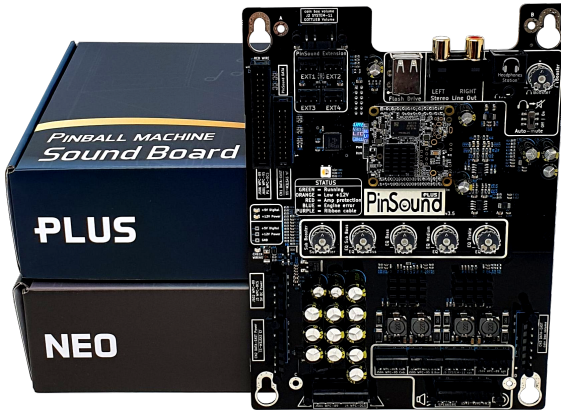

Extended compatibility

The very same PinSound+ board can be installed in more than 100 different pinball machines.



High quality and definition

Total freedom in music creation without any limit on sound quality.



Loud and clear

Double high efficiency class-D amplifiers and advanced PinSound technology for loud and clear sound.



Rediscover your pinball machine

A new sound package means a complete new game! You'll start a fresh new journey on your pinball machine.

Sound does matter



Motion Control

Upgrade your favorite pinball machine with a shaker!



Gameplay synchronized

Hundreds of trigger possibilities



Easy to install

No technical skills needed



3 levels of power

Low/Medium/High

Get ready to shake



www.pinsound.org • worldwide shipping