# · PINBLASTER®

For Stern SAM



ps-pinblaster-sam

(S) KIT CONTENT

1)POWER OFF

(2) OPEN BACKBOX









## (3) DISCONNECT FROM CPU BOARD

> Disconnect J10 AUDIO

Disconnect J11 POWER

Disconnect J12 SWITCH RETURNS


Disconnect J13 DED. SWITCHES



J13

Reconnect J13 (right angle)





#### 5) INSTALL THE PINBLASTER BOARD

> Check heatsinks alignment before insertion






## (6) RECONNECT

- > Reconnect
- J10
- > Reconnect
- J11
- > Reconnect J12
- ➤ Connect ribbon cable







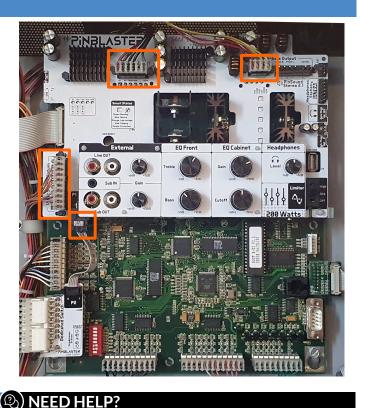

## 7)TURN ON

(A) NEED HE

➤ Check SMART Status



Installation video Guide Q&A Advanced settings

www.pinsound.org/support



## ( RECOMMENDED PRODUCTS FOR STERN SAM











